

Zytel® 70G13HS1L NC010

NYLON RESIN

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® 70G13HS1L NC010 is a 13% glass fiber reinforced, heat stabilized polyamide 66 resin for injection molding.

Product information

Resin Identification	PA66-GF13	ISO 1043
Part Marking Code	>PA66-GF13<	ISO 11469
ISO designation	ISO 16396-PA66,GF13,M1GHNR,S14-050	

Rheological properties

	dry/cond.		
Viscosity number	3790 ^[1] /*	in ³ /lb	ISO 307, 1628
Molding shrinkage, parallel	0.7 / -	%	ISO 294-4, 2577
Molding shrinkage, normal	1.2 / -	%	ISO 294-4, 2577
[1]: formic acid			

Typical mechanical properties

	dry/cond.		
Tensile modulus	798000 / 508000	psi	ISO 527-1/-2
Tensile stress at break, 5mm/min	17400 / 10900	psi	ISO 527-1/-2
Tensile strain at break, 5mm/min	3 / 13	%	ISO 527-1/-2
Flexural modulus	711000 / 421000	psi	ISO 178
Flexural strength	27600 / 14500	psi	ISO 178
Flexural stress at 3.5%	23900 / 13100	psi	ISO 178
Tensile creep modulus, 1h	* / 479000	psi	ISO 899-1
Tensile creep modulus, 1000h	* / 319000	psi	ISO 899-1
Charpy impact strength, 23°C	15.2 / 33.3	ftlb/in ²	ISO 179/1eU
Charpy impact strength, -30°C	14.3 / 14.3	ftlb/in ²	ISO 179/1eU
Charpy notched impact strength, 23°C	2.38 / 2.85	ftlb/in ²	ISO 179/1eA
Charpy notched impact strength, -30°C	- / 1.9	ftlb/in ²	ISO 179/1eA
Charpy notched impact strength, -40°C	2.14 / -	ftlb/in ²	ISO 179/1eA
Izod notched impact strength, 23°C	2.14 / 1.9	ftlb/in ²	ISO 180/1A
Izod notched impact strength, -30°C	2.14 / 1.43	ftlb/in ²	ISO 180/1A
Izod notched impact strength, -40°C	2.14 / 1.43	ftlb/in ²	ISO 180/1A
Izod impact strength, 23°C	19 / 26.2	ftlb/in ²	ISO 180/1U
Izod impact strength, -30°C	16.6 / 13.3	ftlb/in ²	ISO 180/1U

Zytel® 70G13HS1L NC010

NYLON RESIN

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	504 / *	°F	ISO 11357-1/-3
Glass transition temperature, 10°C/min	176 / 68	°F	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	455 / *	°F	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	491 / *	°F	ISO 75-1/-2
Ball pressure test	428 / -	°F	IEC 60695-10-2
Coefficient of linear thermal expansion (CLTE), parallel	0.22 / *	E-4/°F	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), parallel, -40-23°C	0.233 / *	E-4/°F	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), parallel, 55-160°C	0.144 / *	E-4/°F	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	0.517 / *	E-4/°F	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal, -40-23°C	0.428 / *	E-4/°F	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal, 55-160°C	0.828 / *	E-4/°F	ISO 11359-1/-2
Thermal conductivity of melt	0.16	W/(m K)	ISO 22007-2
Effective thermal diffusivity, flow	8.5E-8	m²/s	ISO 22007-4
Specific heat capacity of melt	2370	J/(kg K)	ISO 22007-4
RTI, electrical, 0.75mm	284	°F	UL 746B
RTI, electrical, 1.5mm	284	°F	UL 746B
RTI, electrical, 3.0mm	284	°F	UL 746B
RTI, impact, 0.75mm	257	°F	UL 746B
RTI, impact, 1.5mm	257	°F	UL 746B
RTI, impact, 3.0mm	257	°F	UL 746B
RTI, strength, 0.75mm	284	°F	UL 746B
RTI, strength, 1.5mm	284 / *	°F	UL 746B
RTI, strength, 3.0mm	284	°F	UL 746B

Flammability

	dry/cond.		
Burning Behav. at 1.5mm nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	0.0591 / *	in	IEC 60695-11-10
UL recognition	yes / *		UL 94
Burning Behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	0.0280 / *	in	IEC 60695-11-10
UL recognition	yes / *		UL 94
Glow Wire Flammability Index, 0.75mm	1200 / -[DS]	°F	IEC 60695-2-12
Glow Wire Flammability Index, 1.5mm	1200 / -[DS]	°F	IEC 60695-2-12
Glow Wire Flammability Index, 3.0mm	1470 / -[DS]	°F	IEC 60695-2-12
Glow Wire Ignition Temperature, 0.75mm	1250 / -[DS]	°F	IEC 60695-2-13
FMVSS Class	SE		ISO 3795 (FMVSS 302)

[DS]: Derived from similar grade

Zytel® 70G13HS1L NC010

NYLON RESIN

Electrical properties

	dry/cond.		
Dissipation factor, 100Hz	70/2400	E-4	IEC 62631-2-1
Dissipation factor, 1MHz	70/2400	E-4	IEC 62631-2-1
Volume resistivity	>1E13/-	Ohm.m	IEC 62631-3-1

Physical/Other properties

	dry/cond.		
Humidity absorption, 2mm	2.2/*	%	Sim. to ISO 62
Water absorption, 2mm	7.6/*	%	Sim. to ISO 62
Water absorption, Immersion 24h	1.7 ^[2] /*	%	Sim. to ISO 62
Density	0.0444/-	lb/in ³	ISO 1183
[2]: 3.2mm wall thickness			

Emissions

Emission of organic compounds	6 µgC/g	VDA 277
-------------------------------	---------	---------

Injection

Drying Recommended	yes
Drying Temperature	176 °F
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	563 °F
Min. melt temperature	545 °F
Max. melt temperature	581 °F
Max. screw tangential speed	≤0.2 m/s
Mold Temperature Optimum	212 °F
Min. mold temperature	158 °F
Max. mold temperature	248 °F
Hold pressure range	7250 - 14500 psi
Hold pressure time	0.0762 s/mil
Hold Pressure Time (h is the max. wall thickness of the part in mm)	h ² +2 s
Ejection temperature	410 °F

Automotive

OEM	STANDARD	ADDITIONAL INFORMATION
General Motors	GMW3038P-PA66-GF15H	Natural
General Motors	GMW3038P-PA66-GF15H	Black
Hyundai	MS941-03 Type A-2	
Stellantis	B62 0300 / 61/212M+/215E+/H112/13/C1B	CPN2125, 01994_10_00177
Stellantis - Chrysler	MS.50017 / CPN-2125	Natural
VW Group	VW 50133 PA66-3-A	


Zytel® 70G13HS1L NC010

NYLON RESIN

Characteristics

Processing	Injection Molding
Additives	Release agent
Special characteristics	Heat stabilized or stable to heat


Stress-strain (dry) (measured on Zytel® 70G13L NC010)

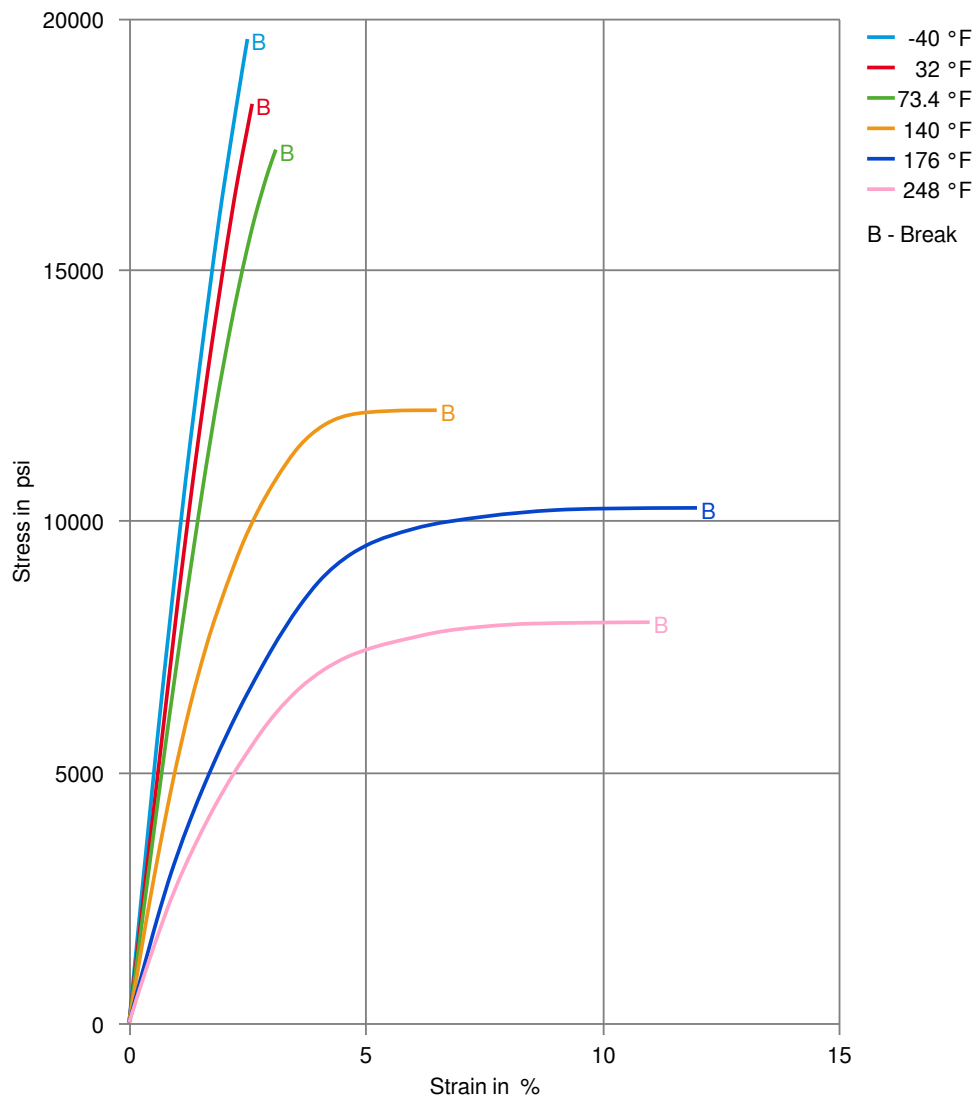

Zytel® 70G13HS1L NC010

NYLON RESIN


Stress-strain (cond.)
(measured on Zytel® 70G13L NC010)

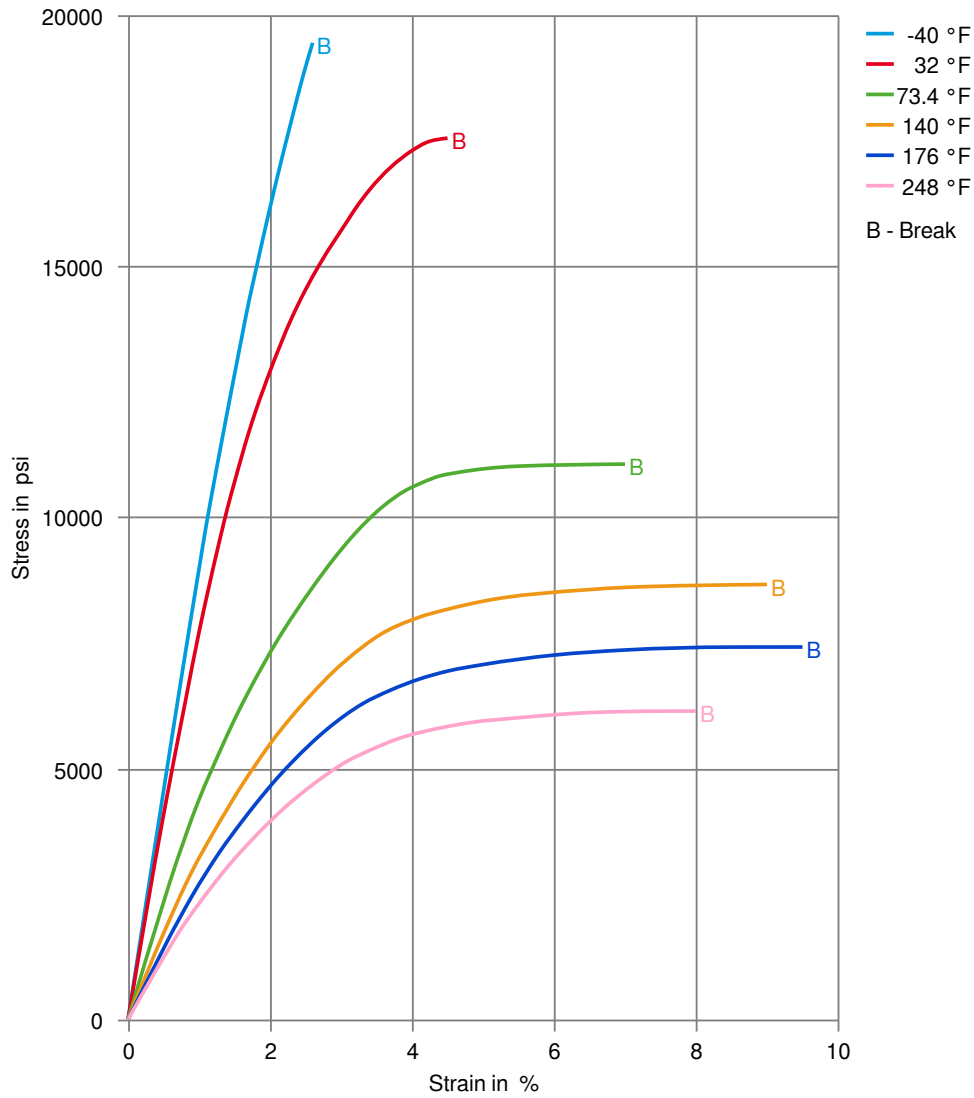

Zytel® 70G13HS1L NC010

NYLON RESIN


Secant modulus-strain (dry)
(measured on Zytel® 70G13L NC010)

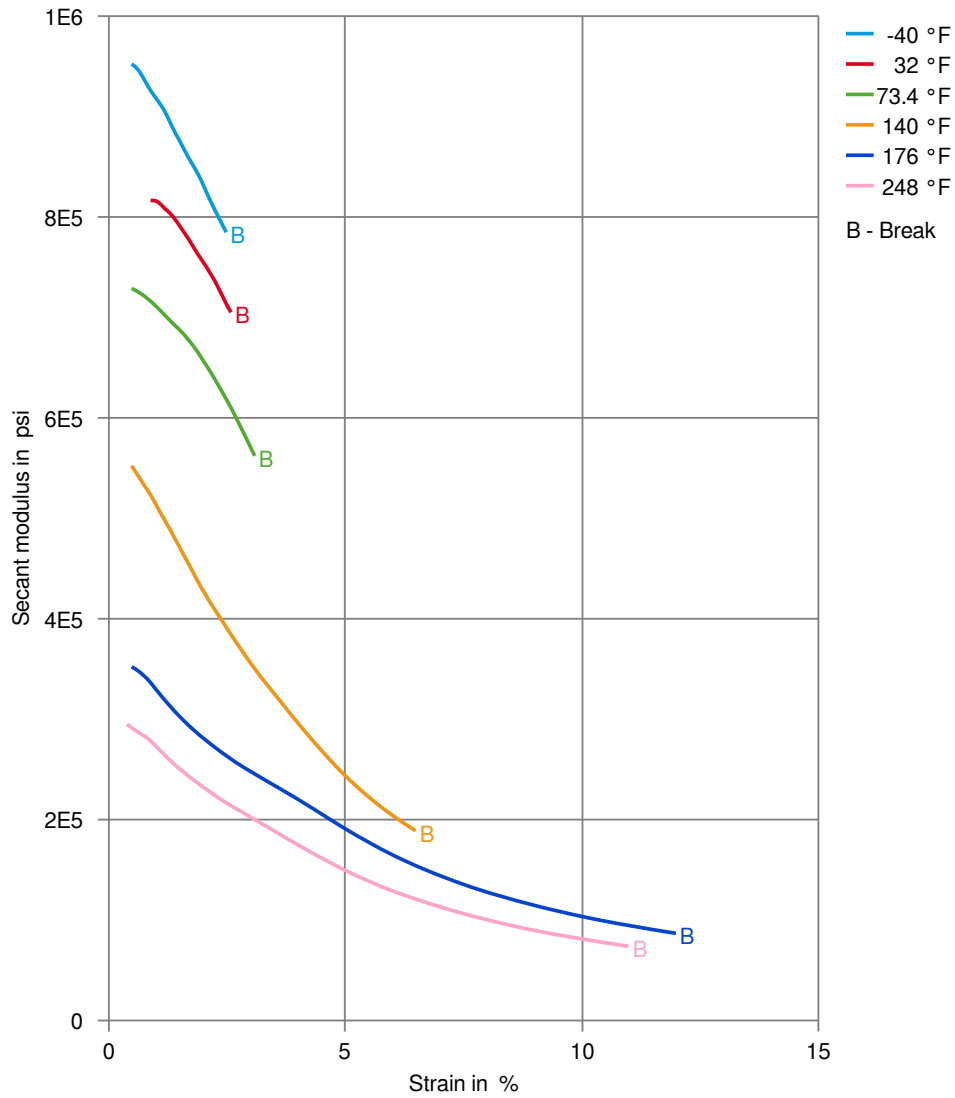

Zytel® 70G13HS1L NC010

NYLON RESIN

Secant modulus-strain (cond.)
(measured on Zytel® 70G13L NC010)

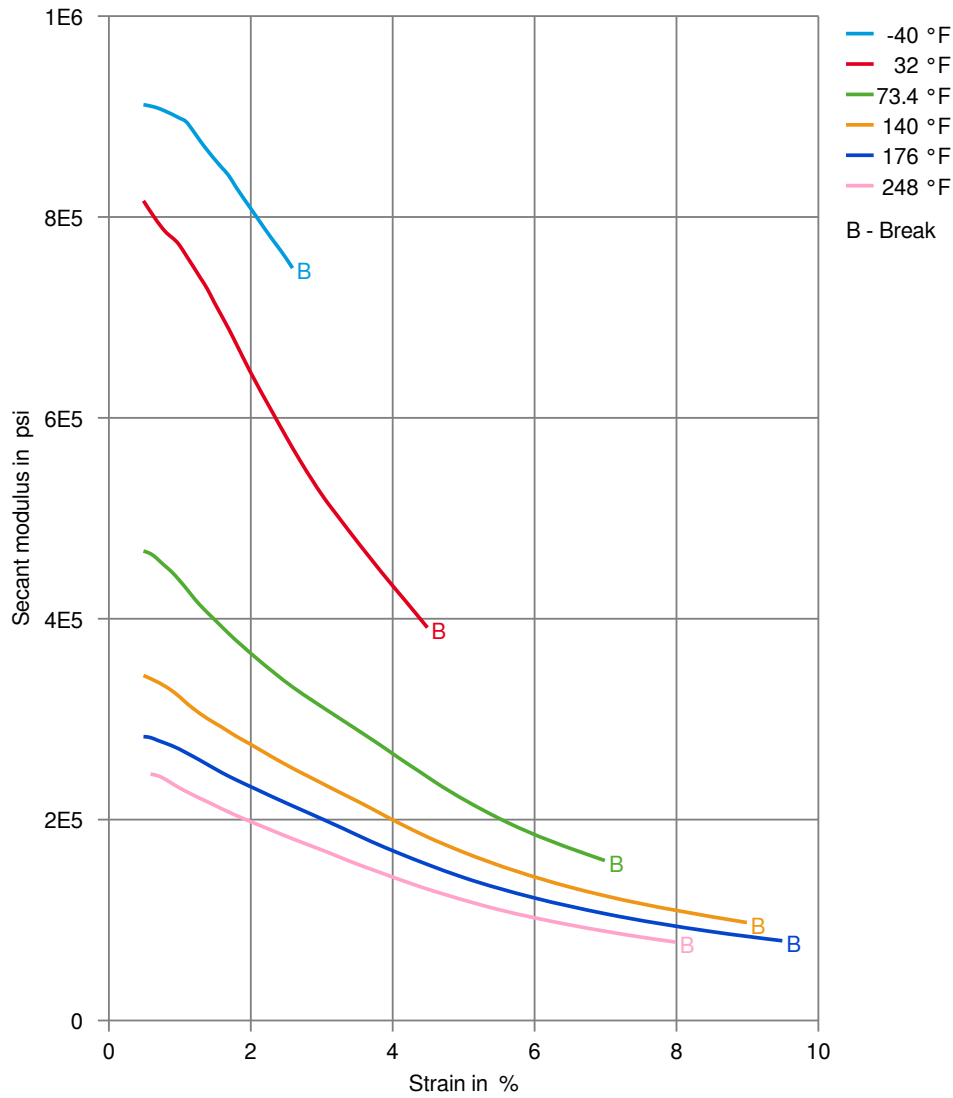

Zytel® 70G13HS1L NC010

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✗ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✓ Acetone, 23°C

Ethers

- ✓ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✓ SAE 10W40 multigrade motor oil, 130°C
- ✓ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5, 60°C
- ✓ ISO 1817 Liquid 2 - M15E4, 60°C
- ✓ ISO 1817 Liquid 3 - M3E7, 60°C
- ✓ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), >90°C

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C

Zytel® 70G13HS1L NC010

NYLON RESIN

- ✓ Sodium Carbonate solution (20% by mass), 23 °C
- ✓ Sodium Carbonate solution (2% by mass), 23 °C
- ✗ Zinc Chloride solution (50% by mass), 23 °C

Other

- ✓ Ethyl Acetate, 23 °C
- ✗ Hydrogen peroxide, 23 °C
- ✓ DOT No. 4 Brake fluid, 130 °C
- ✓ Ethylene Glycol (50% by mass) in water, 108 °C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23 °C
- ✓ 50% Oleic acid + 50% Olive Oil, 23 °C
- ✓ Water, 23 °C
- ✓ Water, 90 °C
- ✗ Phenol solution (5% by mass), 23 °C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).